



R4605HS FULL EXTENSION INTER-LOCKING BALL BEARING SLIDE


三节互锁滚珠滑轨




- 三节、互锁
- 滑轨宽度: 45.7mm
- 载重: 45kg
- 表面处理: 电泳、电镀
- 材质: 冷轧钢板
- 材料厚度(内、中、外)轨: 1.5x1.2x1.2mm

- Full-extension, inter-locking
- Slide width: 45.7mm
- Dynamic load capacity: 45kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.2x1.2mm


滑轨安装尺寸 Installation size

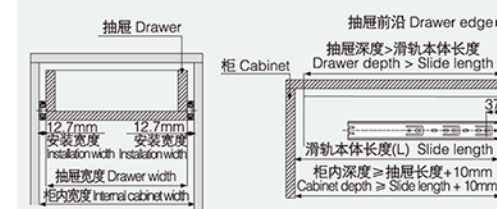

滑轨截面图 Profile




互锁安装示意 Installation size of the inter-locking

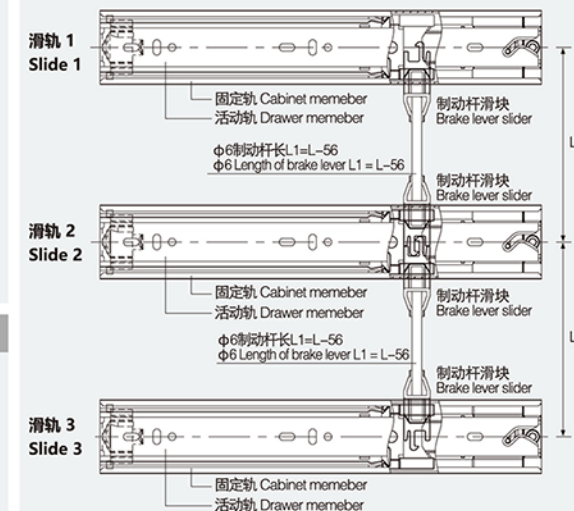

互锁功能: 安装完毕后, 滑轨1处于可以自由拉伸状态, 滑轨2和3不能拉出; 当拉出滑轨2时, 滑轨1和3不能拉出; 当拉出滑轨3时, 滑轨1和2不能拉出。
Interlocking function: After installation, the slide 1 is in a free stretching state, and the slide 2 and 3 cannot be pulled out; when the slide 2 is pulled out, the slide 1 and 3 cannot be pulled out; when the slide 3 is pulled out, the slide 1 and 2 cannot be pulled.

滑轨安装孔尺寸 Hole pattern

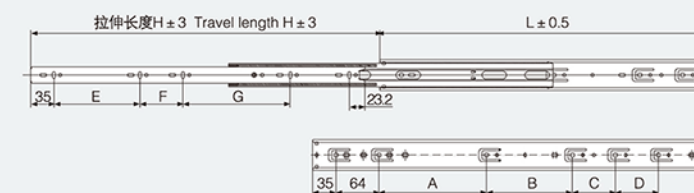

产品型号 Item No.	Length mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	L mm	H mm
R4605HS-250	250	86				64			250	238
R4605HS-300	300	136				128			300	306
R4605HS-350	350	160				128			350	370
R4605HS-400	400	160	64			128			400	420
R4605HS-450	450	160	128			128	192		450	469
R4605HS-500	500	160	128	64		128	64	160	500	519
R4605HS-550	550	160	128	64		128	64	192	550	548
R4605HS-600	600	160	128	64	64	128	64	224	600	621

卡口形状及距离可按客户实际情况定制, 如图表没有其它规格型号, 可按客户实际要求设计。
Bayonet shape and distance can be made according to customer's requirement.